

FORTBRAND



epoke®



TOWED SPREADERS




epoke is innovation!

The Epoke principle ensures unparalleled precision in material spreading.

epoke principle patented 1956

1
An agitator prevents material bridging and crushes large lumps ensuring accurate material supply.

A delivery roller ensures accurate and consistent material delivery.

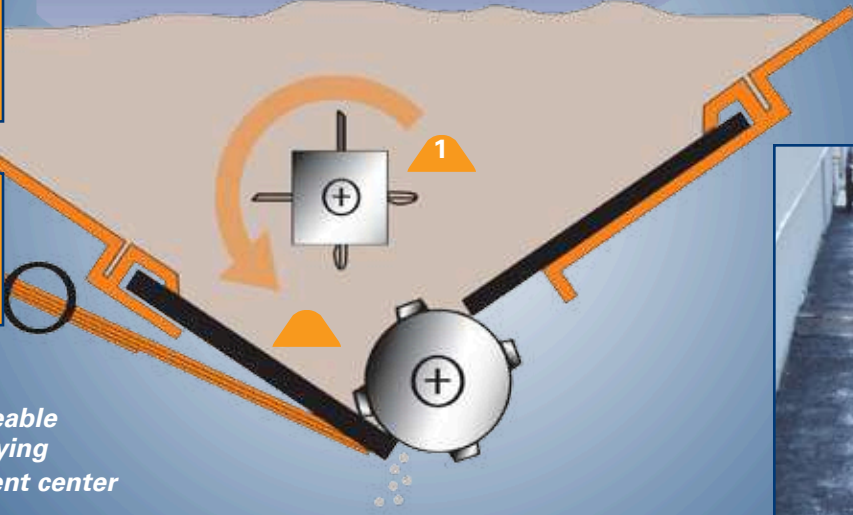

Spread Pattern

ADVANTAGES

- Minimal wear - serviceable
- Uniform hopper emptying maintains a consistent center of gravity
- Accurate spread width minimizes damage to the surrounding landscape

Epoke's Industry-best



We Build It. We Back It.

Epoke equipment is characterized by durability and dependability and the most protective paint process in the industry.

Steel-shot blasted and micro-textured for strength and primer adhesion

Two applications of a multi-component primer base coat



Rustproofed using zinc dust primer

Two layers of strengthened polyurethane top-coat

Combined with multi-stage curing treatments and stainless steel fasteners, this process provides optimum anti-corrosion protection, guaranteed for 10 years!

15 Year
Parts Availability
Guarantee



Includes all components and electronic controls

EpoMini Series & Drawbar Op

EpoMini 5



-
-
-
-
-

Capacity	50 liters	1.8 cubic feet
Total Width	750 mm	29.5"
Track Gauge	700 mm	27.5"
Spreading Width	550 mm	22"
Weight	30 kg	66 lbs

EpoMini 0



-
-
-
-
-

Capacity	200 liters	7.1 cubic feet
Total Width	1065 mm	42"
Track Gauge	990 mm	39"
Spreading Width	800 mm	31.5"
Weight	75 kg	165 lbs

Drawbar Options

see your Epoke Dealer for availability by model



Ball coupling



Draw eye



Fork



Three point hitch bracket



Reversible ball coupling and draw eye



Lift truck fitting

PM Series

PM 1.



3 Point Hitch Mount
PTO driven
Available hopper extensions:
60 liter (2.0 cubic feet)
140 liter (5.0 cubic feet)
Not road speed related

Capacity	140 liters	5.0 cubic feet
Total Width	1090 mm	43"
Spreading Width	1010 mm	40"
Weight	91 kg	201 lbs

PMH 1.



3 Point Hitch Mount
Hydraulically driven -
2 transmission choices:
30 liter (8 gal)/ minute
15 liter (4 gal)/ minute
Available hopper
extensions:
60 liter (2.0 cubic feet)
140 liter (5.0 cubic feet)
Not road speed related

Capacity	140 liters	5.0 cubic feet
Total Width	1090 mm	43"
Spreading Width	1010 mm	40"
Weight	85 kg	188 lbs

ITM 5



Capacity	350 liters	½ cubic yard
Total Width	1150 mm	45"
Track Gauge	1030 mm	40.5"
Spreading Width	780 mm	31"
Weight	145 kg	320 lbs

ITM 5



Capacity	450 liters	5/8 cubic yard
Total Width	1435 mm	56.5"
Track Gauge	1290 mm	51"
Spreading Width	1010 mm	40"
Weight	192 kg	423 lbs

ITM 60



Capacity	600 liters	3/4 cubic yard
Total Width	1895 mm	75"
Track Gauge	1730 mm	68"
Spreading Width	1460 mm	57.5"
Weight	220 kg	485 lbs

SKE Series

SKE 15



*Towed- road speed related
Municipal Grade
Optional 0.5 m³ (0.7 cubic yards)
hopper extension*

Capacity	1.25 m³	1.64 cubic yard
Total Width	1665 mm	66"
Track Gauge	1000 mm	31"
Spreading Width	1390 mm	55"
Weight	600 kg	1323 lbs

SKE 8



*Towed- road speed related
Municipal Grade
Optional Combi Liquid Kit:*

*On new builds or can be
retrofit on existing units
360 liter (95 gallon)
liquid tanks*



Capacity	750 liters	1 cubic yard
Total Width	1285 mm	51"
Track Gauge	790 mm	31"
Spreading Width	1008 mm	40"
Weight	400 kg	880 lbs

SKE 0



*Towed- road speed related
Municipal Grade*

Capacity	1.65 m³	2.16 cubic yard
Total Width	2195 mm	86"
Track Gauge	1530 mm	60"
Spreading Width	1920 mm	76"
Weight	720 kg	1588 lbs

TK, TMK & PSL Series

TKB1 - 80



TMK10- 5



Capacity	1.2 m³	1.6 cubic yard
Total Width	2800 mm	110"
Track Gauge	1800 mm	71"
Spreading Width	2500 mm	98"
Weight	710 kg	1565 lbs

Capacity	1.0 m³	1.3 cubic yard
Total Width	2750 mm	108"
Track Gauge	2330 mm	92"
Spreading Width	2000 mm	79"
Weight	400 kg	882 lbs

PSL 6.5

Capacity	600 liters	3/4 cubic yard
Total Width	1980 mm	78"
Spreading Width	1770 mm	70"
Weight	315 kg	695 lbs





THE EPOKE ADVANTAGE

epoke is innovation

From the original spinner disc through ongoing advancements in runway, walkway and road maintenance, Epoke is innovation!

environment

Epoke's advanced control system ensures accurate rates and precise placement of material- reducing environmental impact!

ease of use

Compact size, big results!

endurance

We build it. We Back it! Manufactured to ISO standards with quality components - Epoke spreaders are built to last and backed with an industry best warranty!

economy

From reductions in material use to long life components... save money on materials, save money on your spreader life cycle cost!

Epoke dealers are chosen because of their expertise and commitment to providing superior customer service and solutions. Our dealer program provides comprehensive and ongoing training as well as integrated customer support. Service you can rely on, equipment you can depend on - a team you can trust!

FORTBRAND

NORTH AMERICA

50 Fairchild Court

Plainview, New York 11803

Telephone: 516-576-3200

Fax: 516-576-3221

E-mail: info@fortbrand.com



Epoke North America Inc.

2458 Huntley Road,
Stittsville, ON Canada, K2S 1B8

Tel. 613 838-2300

Toll Free 888 334-2464

Fax 613 838-2336

www.epokena.com